




# BERKELEY® VT SERIES FAIRBANKS NIJHUIS® 7000 SERIES LINESHAFT TURBINE PUMPS BEARING LOCATIONS

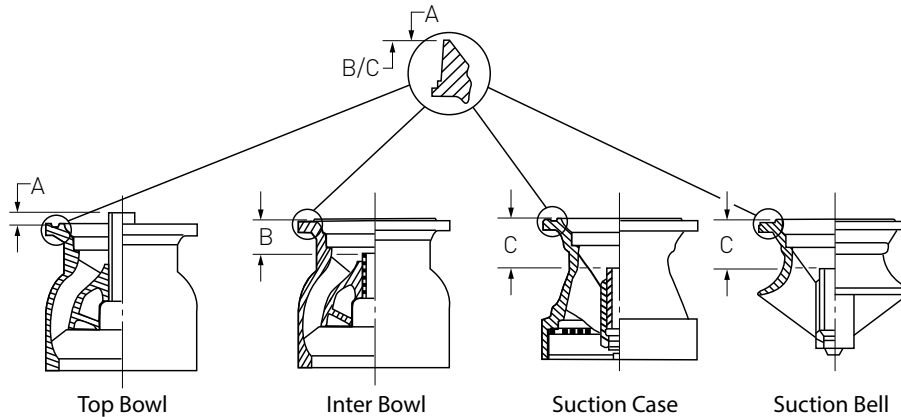

PUMP	A	B	C
6M	.45	1.56	2.77
7M	.45	1.56	2.77
8M	.32	1.38	2.40
10VT-250	-0.355	2.57	2.506
10VT-300	-0.355	2.57	2.506
10VT275	-0.69	2.658	5.05
10VT400	-0.03	3.32	5.05
10VT550	-0.505	2.845	5.05
10VT700	-0.599	2.75	5.05
10VT900	-0.05	3.3	5.05
10VT1150	-0.175	3.175	5.05
10VT1500	-0.389	2.962	5.05
10M	.54	1.88	2.32
10XHC*	-.12	2.12	1.75
12VT550	-0.608	2.392	4.64
12VT650	-0.608	2.392	4.64
12VT900	0.069	3.069	4.64
12VT1100	0.075	2.925	4.64
12VT1350	0.391	3.391	4.64
12VT1650	0.391	3.391	4.64
12VT2000	-0.269	2.731	4.64
12VT2500	-0.269	2.731	4.64
12VT-500	-0.562	2.432	3.51
12VT-600	-0.562	2.432	3.51
11H	.12	2.53	3.36
11M	.90	1.88	3.43

PUMP	A	B	C
12M	.68	2.24	3.94
12MC	.68	1.75	1.62
12HC	.68	2.62	2.00
12L	.68	2.06	3.94
12XHC	.64	2.50	1.62
13H	.16	2.96	3.88
14M	.70	2.58	4.50
14MC	.12	2.12	2.12
14XHC*	-.68	2.68	1.88
15H	.06	3.64	4.92
10 XHH	0.0	2.687	3.687
17M	.156	2.875	5.406
17H	0.0	4.218	5.406
21H	.19	4.218	4.06
27M	-4.81	4.81	5.90
27M	1.19	4.81	5.90
31M	-5.38	5.38	11.10
31M	1.06	5.38	11.10
23HH	.32	3.38	3.06
23HM	.32	3.38	3.06
23HL	.32	3.38	3.06
20HH	-.31	2.81	2.09
26HH	-3.06	3.06	3.87
18XH	-4.28	3.028	6.10
33HH	-1.93	1.93	4.77
27M*	-0.06	4.81	5.90

Notes: 6M, 7M, 8M, KHH use threaded connection. Dimension A, B, C are from top of male thread.  
\*27M, 10XHC, and 14XHC are below surface indicated instead of above.

5661 NORTH GOLDEN STATE BLVD., FRESNO, CA 93725-1300  
PH: 559-266-0516 ORDERS FAX: 559-266-5341  
www.BerkeleyPumps.com

3601 FAIRBANKS AVENUE, KANSAS CITY, KANSAS 66106  
PH: 913-371-5000 ORDERS FAX: 913-748-4025  
www.FairbanksNijhuis.com

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.